

LOAD TABLE

DISTINCTION


Prefinished steel siding with no screws apparent

DISTINCTION

REVÊTEMENT D'ACIER ARCHITECTURAL - ARCHITECTURAL STEEL SIDING



STANDARD AND VENTED PROFILES

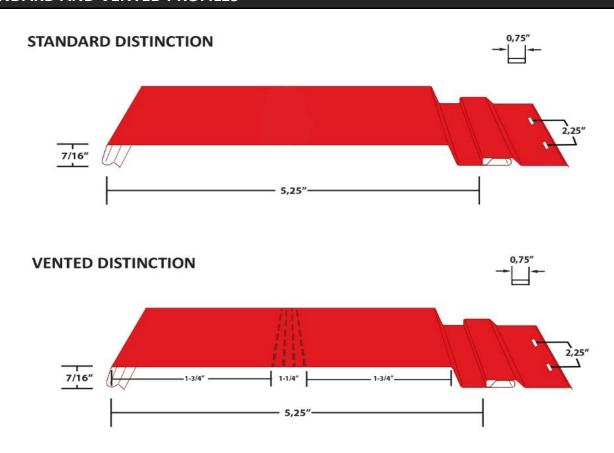

Offers 33 sq-in of ventillation per piece

PHYSICAL PROPERTIES				
Total nominal thickness (painted)		Total nominal thicknes of base (not painted)		
26 ga	24 ga	26 ga		
0,021 in	0,023 in	0,019 in		

TESTING

ASTM A653 SS Grade 33 G-90



LOAD TABLE

DETAILS AND AVAILA	BILITY		
Details		Dimensions	
Application		Walls	
Caliber		26 ga - 24 ga*	
Lenght		12 ft - (144 in) - (3658 mm)	
Coverage height		5,25 in - <i>(133,35 mm)</i>	
Depth of the profile		7/16 in - (0,44 in) - (11,11 mm)	
Opening for screws		3/4 in - (0,75 in) - (19 mm)	
Distance between openning for screws		2-1/4 in - (2,25 in) - (57,15 mm)	
Packaging		12 pieces / box (63 finished square feet)	
Full line of matching accesso	ories		
\ \ \			
Couleurs	Code	Calibre	Série de couleurs
Blanco	QC 183035	26 ga	Nuanced wood series
Cedarwood	QC 182783	26 ga	Nuanced wood series
Desert	QC 182780	26 ga	Nuanced wood series
Expresso	QC 182525	26 ga	Nuanced wood series
Urbain grey	QC 182535	26 ga	Nuanced wood series
Smoked black	QC 182786	26 ga	Nuanced wood series
Exotic walnut	QC 182795	26 ga	Nuanced wood series
Sequoia	QC 182530	26 ga	Nuanced wood series
Jet black	QC 60039	26 ga	Granite series
Graphite grey	QC 60035	26 ga	Granite series
Metallic silver	QC 10400	24 ga	Metallic series

NOTE: When covering more than 12 linear feet of surface, it is possible to overlap the ends of the profile with the notches made by the manufacturing process.

INSTALLATION SURFACES

Plywood (minimum thickness of 5/8 in);

Wood strapping (minimum 1 in x 4 in - 16 in on center);

Metal strapping (minimum 1 -1/4 in x 3/4 in x 1-1/4 in at 16 in on center);

NOTE: For best results, it is very important that the installation surface is level horizontally as well as vertically.

INSTALL	
Vertically	
Horizontally	
Diagonally	