

Designed to inspire.
BUILT TO LAST.



Siding • Windows • Doors • Soffit & Fascia • Rainware • Building Envelope • Tools & Equipment



For more than 55 years,

Gentek Building Products has been the premier choice for beautiful products, impeccably built. Our wide array of materials, profiles, colours and finishes expertly achieve high-performance design with easy-care simplicity – exactly what today’s homeowners are looking for. When it comes to choosing superior materials for your next project, you can depend on Gentek for quality and style like no other.

- 4** Colour & Design Inspiration
- 6** ALIGN™ Composite Cladding
- 8** Sequoia® Select EnFusion®
- 10** Sequoia® Select
- 12** Board & Batten
- 13** Fair Oaks®
- 14** Concord®
- 15** Driftwood® II
- 16** Deluxe™ Aluminum
- 17** Woodgrain™ 2000
- 18** Sierra™ Steel
- 20** Soffit & Fascia
- 22** Rainware & Gutter Guards
- 23** ChamClad
- 24** Quality Stone
- 25** Distinction & Moderno
- 26** Longboard®
- 27** Everlast®
- 28** Shakes & Shingles
- 29** Versetta Stone®
- 30** Hardie® Plank & Hardie® Shingle
- 31** Blocks, Vents, Shutters & Columns
- 32** Regency® 400 Series Windows
- 33** Regency® Windows
- 34** 80 Series Windows
- 35** 70 Series & Amherst™ Windows
- 36** Doors
- 38** Building Envelope
- 39** Tools & Equipment
- 40** Colour Matrices
- 46** Architectural Specifications

For trim, accessories, gutter coil and other product information, please see the detailed Gentek Product Directory.





Gentek composite cladding, siding, windows, doors and trim accessories bring easy living to the forefront. The premium appearance provides the beauty of freshly painted or stained wood but without the worries of rotting, splitting, warping or insect damage. This extensive product collection offers every “must have” for upscale style in a virtually maintenance-free home exterior.

THE BEAUTY OF SUPERB CRAFTSMANSHIP

Featuring high-performance materials and cutting-edge technology, Gentek products are expertly crafted to withstand harsh weather elements, including pounding rain, high winds, intense heat and frigid cold. We’ve also fortified our darker siding colours with fade-defying colour formulations to provide superior colour retention and resistance to weathering – ensuring the luxurious finish stays true.

FUTURE-FORWARD AND VALUE-RICH

For most people, a home is a source of pleasure and pride, as well as an important investment. Gentek products not only will create an attractive finish, they will heighten the home’s curb appeal as well. And, in today’s resale market, a beautiful, low-maintenance exterior can be a valuable amenity.

GENTEK SETS THE STAGE FOR SUCCESS!

Choosing just the right products, profiles and colours makes it possible to reveal each home’s perfect potential. Horizontal, vertical and specialty siding are just the starting point. Beautiful new windows, doors, rainware, decorative accessories and trim complete the picture. Gentek also offers a full selection of building envelope products, tools and equipment to streamline your projects with simplicity and ease.

Design inspiration starts here.

The power of colour is undeniable when creating a beautiful home exterior. From sublime palettes in monochromatic tones to bold contrasting architectural hues, colour defines the design. Gentek products are available in a grand scale of colourful options that let you tailor the look with signature style.



COLOUR MATCHING MADE SIMPLE

No need to settle for siding and trim that “almost match.” Our exclusive Colour Clear Through® collection of customer-preferred hues helps ensure a beautiful colour match with other Gentek siding, trim and accessory products.



CHOOSE DARKER SIDING COLOURS WITH CONFIDENCE

Richer, more resilient colours. A luxurious, low-luster finish with a depth of visual appeal. Enduring beauty and performance. Gentek vinyl siding has never been better – thanks to ChromaTrue® fade-defying colour technology.

This advanced copolymer compound fortifies our darker colour sidings with superior colour retention and protection from the elements, including exposure to intense sun and heat, pounding rain, saltwater and chemicals. ChromaTrue also provides a highly weatherable finish that stands up strong to dings and abrasions.



CUSTOM-PAINTED WINDOWS

Regency 400 Series and Regency window exteriors can be custom painted to match any of our trim colours, allowing you to achieve a truly upscale appearance for your exterior design. Interior colours are extruded Nordic White and extruded White, respectively.



EXTENSIVE TRIM COLOUR SELECTION

We have one of the largest selections of colours available for aluminum trim, soffit and fascia, including many shades of a single hue, to let you perfectly refine your custom design.



Matching Accents

Door trim, porch railing and other exterior accents can be painted to match your Gentek siding and windows. Gentek proudly offers Dulux exterior paint for all of Gentek's most popular colours. Please note that paint colour codes are formulated for Dulux paint only.



FREE DESIGN ADVICE – JUST FOLLOW THE BLOG

Whether you want to simply refresh the appearance of a home – or press the reset button – Gentek is here to help! Just follow our MyDesign Home Studio blog at mydesignhomestudio.com to enjoy a wide range of design tips and renovation ideas, as well as a question and answer portal offering professional design advice for any project.

Ask your Gentek Sales Representative about our Gentek RenoPro Software that can be personalized for your business.

GENTEK VISUALIZER

Take your renovation projects to the next level with the Gentek Visualizer. This easy-to-use program lets you create “before and after” shots featuring a variety of colour schemes that showcase your renovation ideas.

- Design-ready with a gallery of house images; access it from any mobile device and start designing.
- Custom “photo-realistic” option – upload a photo of your customer’s home and use the design tools to apply products to your photo (our design team also can professionally prep the photo for you).
- Pre-selected products and colour combinations are offered for design inspiration.
- Save your preferred products, colours and designs – everything is listed and ready to go.

Visit gentekcanada.renoworks.com to get started today!




ALIGN™

COMPOSITE CLADDING


Product Specifications:

Nominal Thickness: 3/4" (19)
Windload: Meets or exceeds ASTM D5206-13 industry test standard for negative windload resistance
Texture: Cedar mill grain



Colour Palette

Snow White	Dover Gray	Rockwell Blue
Almond	Chesapeake Gray	Midnight Surf
Monterey Sand	Storm	Marine Dusk
Pebble	Hudson Slate	Meadow Fern
Dark Drift	Windswept Smoke	Moonlit Moss
Rockport Brown	Iron Ore	Majestic Brick
Smoked Timber	Coastal Blue	



7" Plank

3/8" Butt (9.5)
 Panel Projection 3/4" (19)
 7" Exposure per Panel (177.8)
 12'3" Length (3733.8)

Packaging:

14 pcs. per ctn.
 1 sq. per ctn. (9.2 m²)

IT'S NOT JUST PRETTY, IT'S PRETTY AMAZING

As the world's first composite cladding with Glass-Reinforced Polymer and Graphite-Infused Polystyrene (GP)² Technology[®], ALIGN delivers every must-have for style, strength, durability and easy upkeep. The deep cedar grain emboss and low-gloss finish achieve a remarkably realistic wood look in a high-performance exterior that's virtually maintenance-free.



Reinforced Nail Hem Ensures extra-strong wall attachment and increased windload resistance.

Installation Ease Lightweight construction with self-aligning stack lock; easier to install than fiber cement or engineered wood and no special tools or respirators required.

Look and Feel of Real Wood You'll have to touch it to tell the difference.


High-End Aesthetics 20 on-trend, fade-resistant colours; never needs to be painted.

Thermal Barrier Protection Insulating performance promotes energy efficiency year-round.

3/4" Panel Projection Compatible with a variety of standard and architectural trim options.

(GP)² Technology[®] Ensures lower expansion and greater structural integrity.

Superior Performance Resists high winds, moisture and impact damage from dents, dings and abrasions.

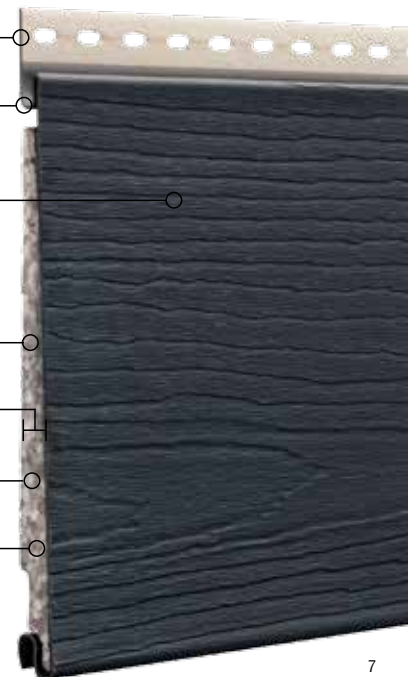


Warranty Coverage:
Lifetime Limited Warranty
Lifetime Limited Fade Coverage
Lifetime Limited Hail Coverage

Please see detailed product directory for accessory information. For metric, unless indicated otherwise, all measurements are in millimeters (mm).

Product Specifications:

Nominal Thickness: Vinyl panel .046"
Windload: Meets or exceeds ASTM D5206 industry test standard for negative windload resistance
Texture: Cedargrain



House shown in Canyon Clay.

Classic Colours

Snow White	Canyon Clay	Storm
Almond	Pebble	Chesapeake Gray
Wicker	Dover Gray	Sage

Designer Colours

Dark Drift	Rockwell Blue	Hudson Slate
Meadow Fern	Midnight Surf	Windswept Smoke
Moonlit Moss		

Not all colours are available in all markets. See your Gentek sales representative for details.

A NEW STANDARD IN QUALITY AND ENERGY SAVINGS¹

Energy-Saving Technology Custom-contoured insulation (up to 1-1/4" thick[†]) creates a blanket of thermal protection.

Greater Impact Resistance Provides more impact resistance than conventional "hollow back" siding for superior strength and a beautifully uniform finish.

Superior Perm Rating of 5 Allows insulation to breathe and moisture to escape, not get trapped inside.

Full-Roll Nail Hem Heavy-duty, double-thick wall attachment increases strength and structural integrity.

Quiet Comfort High-density insulation and integrated panel design help soften outside noise for a quieter indoor ambiance.


Beautiful Wood-Like Appearance Natural cedargrain texture and low-gloss finish for subtle elegance.

Longer Panels The extra-long 16'8" (D6) and 16'4" (D5D) panel lengths create fewer overlaps for a superior finished look.

[†]Nominal.

INTELLIGENT SIDING SOLUTIONS


A fusion of beauty and strength, Sequoia Select EnFusion helps prevent energy loss to keep your home warm and cozy in the winter and refreshingly cool in the summer – with less energy consumption. The laminated, rigid foam insulation is contoured to fill the gap between the siding and your home to provide greater energy efficiency. This protective layer also helps conceal imperfections in the underlayment to ensure smooth wall lines and an upscale appearance.



Double 5" Dutch Lap

Insulated Panel with 1-1/4"
Overall Panel Thickness (31.75)
3/4" Butt (19)
2-5" Exposure per Panel
(127/254)
16' 4" Length (4979)


Packaging:
7 pcs. per ctn.
.95 sq. per ctn. (8.84 m²)



Double 6" Clapboard

Insulated Panel with 1-1/4"
Overall Panel Thickness (31.75)
3/4" Butt (19)
2-6" Exposure per Panel
(152.4/304.8)
16' 8" Length (5080)

Packaging:
6 pcs. per ctn.
1 sq. per ctn. (9.3 m²)

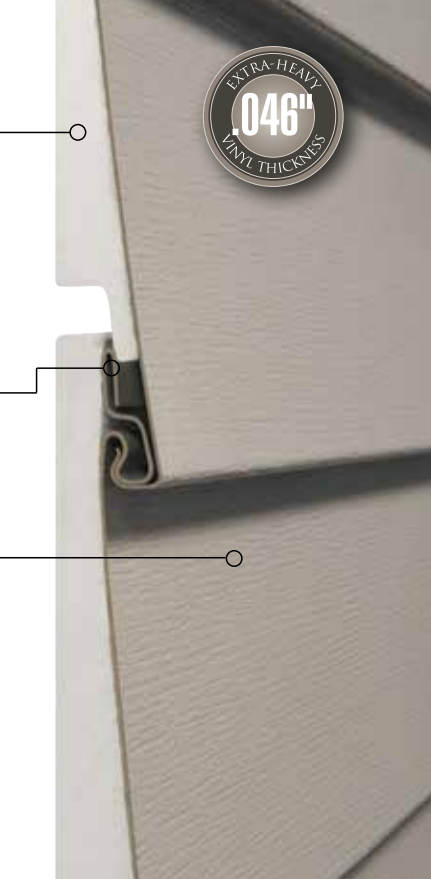

Warranty Coverage:

Lifetime Limited Warranty
Lifetime Limited Fade Coverage
Lifetime Limited Hail Coverage

Please see detailed product directory for accessory information.
For metric, unless indicated otherwise, all measurements are in millimeters (mm).



SEQUOIA SELECT

Ultra-Premium Vinyl Siding

Product Specifications:

Nominal Thickness: .046"
Windload: Meets or exceeds ASTM D5206 industry test standard for negative windload resistance
Texture: Cedargrain



Classic Colours

Snow White	Wicker	Dover Gray
Sandstone	Canyon Clay	Storm
Linen	Pebble	Chesapeake Gray
Almond	Monterey Sand	Sage
Maize	Pearl	Juniper Grove

Designer Colours

Majestic Brick	Meadow Fern	Marine Dusk
Dark Drift	Moonlit Moss	Hudson Slate
Rockport Brown	Rockwell Blue	Windswept Smoke
Espresso	Coastal Blue	Iron Ore
Smoked Timber	Midnight Surf	

Double 5" Clapboard and Double 5" Dutch Lap not available in Designer Colours in British Columbia and Alberta.

THE ULTRA-PREMIUM DISTINCTION

Extra-Heavy Wall Thickness Heavy-duty .046" thickness provides superior rigidity, ensuring straight, smooth walls.

Full-Roll Nailing Hem Delivers double-strength wall attachment.



Exclusive Advantage Lock System Securely connects panels, greatly enhancing rigidity and stability.

Built Weather-Tough! High-performance panel stands up strong to harsh weather, dings and abrasions; won't chip, flake or peel.



Rich Cedargrain Emboss Beautiful low-gloss finish achieves natural appeal and excellent durability; requires minimal upkeep.

Superior Lap Height Full 3/4" lap height creates a deeper dimension and enhanced shadow lines for a true wood look.

A PREMIER HOME EXTERIOR

Exquisite style, exceptional strength – that’s the hallmark of Sequoia Select ultra-premium vinyl siding. Greater panel thickness and deeper dimension. An extraordinary hurricane-velocity wind resistance. A luxurious low-gloss finish embossed with a rich cedargrain texture. All in a generous selection of 29 beautiful colours and 4 classic profiles for tastefully stated elegance.


House shown in Midnight Surf.

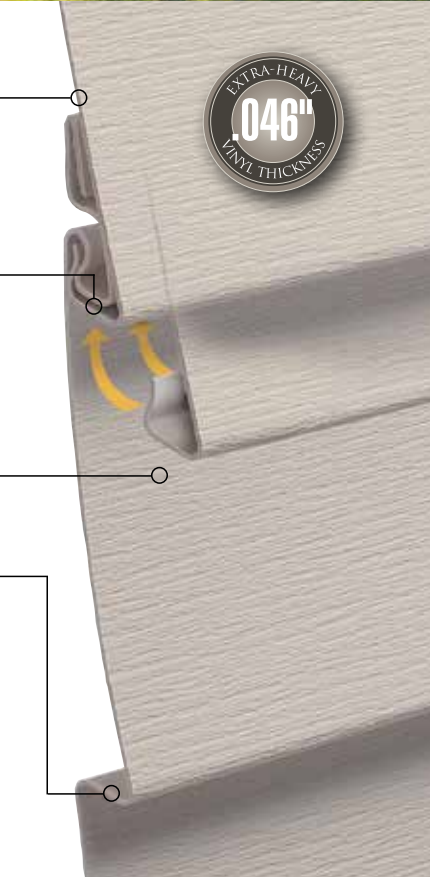

Double 4" Clapboard

3/4" Butt (19)
2-4" Exposure per Panel (101.6/203.2)
12'6" Length (3810)


Packaging:
24 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)



Double 4-1/2" Dutch Lap

3/4" Butt (19)
2-4-1/2" Exposure per Panel (114.5/229)
12'1" Length (3683)


Packaging:
22 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)



Double 5" Clapboard

3/4" Butt (19)
2-5" Exposure per Panel (127/254)
12' Length (3658)

Packaging:
20 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)



Double 5" Dutch Lap

3/4" Butt (19)
2-5" Exposure per Panel (127/254)
12' Length (3658)

Packaging:
20 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)



Warranty Coverage:

Lifetime Limited Warranty
Lifetime Limited Fade Coverage
Lifetime Limited Hail Coverage

Please see detailed product directory for accessory information.
For metric, unless indicated otherwise, all measurements are in millimeters (mm).




BOARD & BATTEN

Ultra-Premium Vertical Vinyl Siding

HISTORICAL CHARACTER

Board & Batten's unique vertical design marries historical appeal with modern practicality. Featuring an authentically proportioned 7" exposure with a 5-1/2" board and 1-1/2" batten strip, this ultra-premium panel works well as a whole-house exterior or as an accent siding.

House shown in Marine Dusk.



Product Specifications:


Nominal Thickness: .050"
Windload: Meets or exceeds ASTM D5206 industry test standard for negative windload resistance
Texture: Light Roughsawn

7" Vertical Board & Batten

1/2" Batten Height (12.7)
 1-1/2" Batten Width (38.1)
 7" Exposure per Panel (178.5)
 10' Length (3048)

Packaging:

17 pcs. per ctn.
 1 sq. per ctn. (9.2 m²)



Classic Colours

Snow White	Wicker	Dover Gray
Sandstone	Canyon Clay	Storm
Linen	Pebble	Chesapeake Gray
Almond	Monterey Sand	Sage
Maize	Pearl	Juniper Grove

Designer Colours (not available in British Columbia and Alberta)

Majestic Brick	Meadow Fern	Marine Dusk
Dark Drift	Moonlit Moss	Hudson Slate
Rockport Brown	Rockwell Blue	Windswept Smoke
Espresso	Coastal Blue	Iron Ore
Smoked Timber	Midnight Surf	



Warranty Coverage:

Lifetime Limited Warranty
 Lifetime Limited Fade Coverage
 Lifetime Limited Hail Coverage



FAIROAKS[®]
Premium Vinyl Siding

HIGH-PERFORMANCE INNOVATIONS

With exquisite colours and an authentic hardwood texture, Fair Oaks captures the timeless appeal of freshly painted wood. Its rolled nail hem, Anchor-Tite Locking System, .044" panel thickness and extra-deep 5/8" butt height together achieve quality and strength beyond ordinary vinyl siding.

House shown in Rockwell Blue.



Product Specifications:

Nominal Thickness: .044"
Windload: Meets or exceeds ASTM D5206 industry test standard for negative windload resistance
Texture: Hardwood


Classic Colours

Snow White	Wicker	Dover Gray
Sandstone	Canyon Clay	Storm
Linen	Pebble	Chesapeake Gray
Almond	Monterey Sand	Sage
Maize	Pearl	Juniper Grove

Designer Colours

Majestic Brick	Meadow Fern	Midnight Surf
Dark Drift	Moonlit Moss	Hudson Slate
Rockport Brown	Rockwell Blue	Windswept Smoke


Double 5" Clapboard and Double 5" Dutch Lap not offered in Designer Colours in British Columbia and Alberta



Double 4" Clapboard

5/8" Butt (15.9)
2-4" Exposure per Panel (101.6/203.2)
12'6" Length (3810)


Packaging:
24 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)



Double 4" Dutch Lap

5/8" Butt (15.9)
2-4" Exposure per Panel (101.6/203.2)
12'6" Length (3810)



Packaging:
24 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)



Double 5" Clapboard

5/8" Butt (15.9)
2-5" Exposure per Panel (127/254)
12' Length (3658)

Packaging:
20 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)



Double 5" Dutch Lap

5/8" Butt (15.9)
2-5" Exposure per Panel (127/254)
12' Length (3658)

Packaging:
20 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)



Warranty Coverage:
Lifetime Limited Warranty
Lifetime Limited Fade Coverage
Lifetime Limited Hail Coverage




CONCORD®

Quality Vinyl Siding

TIMELESS QUALITY AND STYLE


Featuring five versatile profiles embossed with a light roughsawn texture, Concord is a longtime favourite among homeowners who desire the beauty of a freshly painted wood finish but without the time-consuming maintenance. The well-built panel is fortified with a rolled nail hem for extra-strong wall attachment and durability.



Double 4" Clapboard

1/2" Butt (12.7)
2-4" Exposure per Panel (101.6/203.2)
12'6" Length (3810)


Packaging:
24 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)



Double 4" Dutch Lap

1/2" Butt (12.7)
2-4" Exposure per Panel (101.6/203.2)
12'6" Length (3810)


Packaging:
24 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)



Double 5" Clapboard

1/2" Butt (12.7)
2-5" Exposure per Panel (127/254)
12' Length (3658)


Packaging:
20 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)



Double 5" Dutch Lap

1/2" Butt (12.7)
2-5" Exposure per Panel (127/254)
12' Length (3658)

Packaging:
20 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)



10" Vertical

10" Exposure per Panel (254)
10' Length (3048)

Packaging:
24 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)



House shown in Pearl.



Product Specifications:

Nominal Thickness: .042"
Windload: Meets or exceeds ASTM D5206 industry test standard for negative windload resistance
Texture: Light Roughsawn

Classic Colours

Snow White	Wicker	Dover Gray
Sandstone	Canyon Clay	Storm
Linen	Pebble	Chesapeake Gray
Almond	Monterey Sand	Sage
Maize	Pearl	Juniper Grove



Warranty Coverage:
Lifetime Limited Warranty
Lifetime Limited Fade Coverage
Lifetime Limited Hail Coverage

Please see detailed product directory for accessory information. For metric, unless indicated otherwise, all measurements are in millimeters (mm).



DRIFTWOOD® II

Quality Vinyl Siding

INSPIRATION FOR EASY LIVING

From classic to modern, Driftwood II combines eye-catching style with everyday affordability. The low-gloss finish, natural cedargrain texture and rich palette of colours will beautifully showcase the architectural details of any home, while the rolled nail hem and quality construction deliver durability and strength.


QUALITY

House shown in Pebble.



Product Specifications:

Nominal Thickness: .040"
Windload: Meets or exceeds ASTM D5206 industry test standard for negative windload resistance
Texture: Natural Cedargrain




Double 4" Clapboard

7/16" Butt (11.1)
 2-4" Exposure per Panel (101.6/203.2)
 12'6" Length (3810)

Packaging:
 24 pcs. per ctn.
 2 sqs. per ctn. (18.6 m²)

Classic Colours

Snow White	Wicker	Storm
Sandstone	Canyon Clay	Chesapeake Gray
Linen	Pebble	Sage
Almond	Monterey Sand	Juniper Grove
Maize	Pearl	
Amber	Dover Gray	



Double 4-1/2" Dutch Lap

7/16" Butt (11.1)
 2-4-1/2" Exposure per Panel (114/229)
 12'1" Length (3683)

Packaging:
 22 pcs. per ctn.
 2 sqs. per ctn. (18.6 m²)



Warranty Coverage:
 Lifetime Limited Warranty
 Lifetime Limited Fade Coverage
 Lifetime Limited Hail Coverage

DELUXE™

ALUMINUM SIDING

CLASSIC BEAUTY AND APPEAL

Masterfully crafted with attention to detail, the classic profile designs and smooth texture of Deluxe aluminum siding will impart casual elegance to any architectural style. The tough aluminum core and resilient Poly finish provide a durable, weathertight exterior that never needs to be painted.



House shown in Bright White.




8" Horizontal

1/2" Butt (12.7)
8" Exposure per Panel (203.2)
12' 6" Length (3810)

Packaging:

24 pcs. per ctn.
2 sqs. per ctn. (18.58 m²)

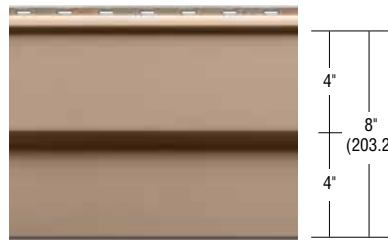


Double 4" Clapboard

1/2" Butt (12.7)
2-4" Exposure per Panel (101.6/203.2)
12' 6" Length (3810)

Packaging:

24 pcs. per ctn.
2 sqs. per ctn. (18.58 m²)




8" Vertical Board & Batten

8" Exposure per Panel (203.2)
10' Length (3048)

Packaging:

15 pcs. per ctn.
1 sq. per ctn. (9.29 m²)



Vertical "V"

7-1/4" Exposure per Panel (184.2)
9' 7-3/8" Length (2930)

Packaging:

17 pcs. per ctn.
1 sq. per ctn. (9.29 m²)

Note: Also available in a heavy-gauge profile.



Texture: Smooth

Colour Palette

Bright White	Canyon Clay	Slate
Ice White	Pebble	Windswept Smoke
Sandstone	Tan	Chestnut Brown
Almond	Brownstone	Commercial Brown
Maize	Dover Gray	Iron Ore
Wicker	Storm	Black

Additional colours available. Not all colours available in all profiles. For specific colour offering, see matrix on page 43.



Warranty Coverage:
40 Year Limited Warranty

Please see detailed product directory for accessory information.
For metric, unless indicated otherwise, all measurements are in millimeters (mm).


WOODGRAIN™ 2000

ALUMINUM SIDING

VERSATILE PROFILES

Warm and welcoming, Woodgrain 2000 combines the traditional beauty of hand-cut wood siding with the high-performance properties of aluminum. Each heavy-duty panel is coated with a specially formulated Poly finish to create a resilient exterior that will maintain its beautiful appearance year after year despite exposure to harsh weather elements.


PREMIUM



8" Horizontal

1/2" Butt (12.7)
8" Exposure per Panel (203.2)
12'6" Length (3810)


Packaging:
24 pcs. per ctn.
2 sqs. per ctn. (18.58 m²)



Double 4" Clapboard

1/2" Butt (12.7)
2-4" Exposure per Panel (101.6/203.2)
12'6" Length (3810)



Packaging:
24 pcs. per ctn.
2 sqs. per ctn. (18.58 m²)



Double 4" Dutch Lap

1/2" Butt (12.7)
2-4" Exposure per Panel (101.6/203.2)
12'6" Length (3810)


Packaging:
24 pcs. per ctn.
2 sqs. per ctn. (18.58 m²)



8" Vertical Board & Batten

8" Exposure per Panel (203.2)
10' Length (3048)

Packaging:
15 pcs. per ctn.
1 sq. per ctn. (9.29 m²)



Vertical "V"

7-1/4" Exposure per Panel (184.2)
9'7-3/8" Length (2930)

Packaging:
17 pcs. per ctn.
1 sq. per ctn. (9.29 m²)

Note: D4 Clapboard, D4 Dutch Lap and 7-1/4" Vertical "V" also are available in a heavy-gauge profile.



House shown in Canyon Clay.



Texture: Woodgrain

Colour Palette

Bright White	Tan	Slate
Ice White	Sandalwood	Hudson Slate
Sandstone	Dark Drift	Chestnut Brown
Almond	Sable	Commercial Brown
Wicker	Dover Gray	Iron Ore
Canyon Clay	Storm	Black
Pebble	Chesapeake Gray	

Additional colours available. Not all colours available in all profiles. For specific colour offering, see matrix on page 43.



Warranty Coverage:
40 Year Limited Warranty

Product Specifications:

Windload: Independently tested to withstand intense wind

Texture: Roughsawn; the 12' Vertical Board & Batten is Medium Woodgrain Texture



Colour Palette

Bright White	Dover Gray
Chelsea Bluff	Storm
Monterey Sand	Iron Ore
Delray Sand	Rockwell Blue
Thistle	Watermill Blue
Sable	Taylor Red
Juniper Grove	

Select Double 5" Clapboard colours are special order. Double 4" Clapboard, 8" Horizontal and 12" B&B profiles are special order only.

Impact Resistant Constructed of roll-formed 29 gauge Galvalume AZ-50 steel for excellent resistance to hail damage and denting.

Built Weather-Tough Rugged steel construction is virtually impervious to outdoor elements. Unlike wood, compressed particleboard or fiber cement, it won't absorb moisture. Steel siding also resists warping, chalking, fading and brittleness in cold weather.

Smooth, Straight Wall Lines Rigid steel panels deliver high dimensional stability and resist buckling and the wavy appearance that can result from expansion and contraction caused by extreme weather changes.

Upscale Appearance Deep 1/2" panel projection creates greater dimension and style with bold edges and dramatic shadow lines. The resilient PVDF finish resists dirt and dust buildup, staining and mildew.

Carefree Maintenance No need for time-consuming painting or scraping. Just a simple rinse with a garden hose will remove most airborne dust and dirt.

A Sustainable Choice Steel siding is 100% recyclable, requires no additional painting or caulking and does not produce silica dust during installation.


Insect Resistant Resists damage from wood-eating insects, such as termites.

LUXURY'S NEW LOOK – THE BEAUTIFUL STRENGTH OF STEEL

Distinguished for its superb durability and versatile design possibilities, metal is on the rise as a prime exterior cladding. Premium raw materials and cutting-edge technology merge with skilled craftsmanship and artistry to achieve the outstanding quality of our Sierra Steel siding. Each panel is virtually “weather-sealed” with a resilient Kynar PVDF coating, a high-performance fluoropolymer resin with a luxurious low-gloss finish.





House shown in Iron Ore.



Double 4" Clapboard

1/2" Butt (12.7)
2-4" Exposure per Panel (101.6/203.2)
12'6" Length (3810)


Packaging:
10 pcs. per ctn.
1 sq. per ctn. (9.29 m²)

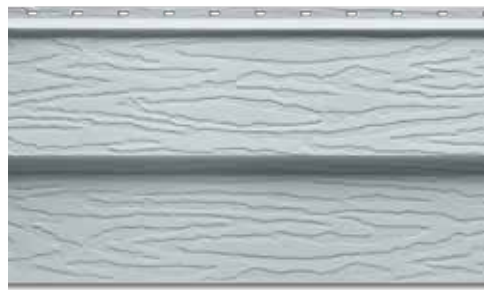

Double 5" Clapboard

1/2" Butt (12.7)
2-5" Exposure per Panel (127/254)
10' Length (3048)


Packaging:
10 pcs. per ctn.
1 sq. per ctn. (9.29 m²)



8" Horizontal

1/2" Butt (12.7)
8" Exposure per Panel (203.2)
12'6" Length (3810)

Packaging:
12 pcs. per ctn.
1 sq. per ctn. (9.29 m²)



12" Vertical Board & Batten

5/8" Batten Height (15.9)
2" Batten Width (50.8)
12" Exposure per Panel (304.8)
10' Length (3048)

Packaging:
10 pcs. per ctn.
1 sq. per ctn. (9.29 m²)



Warranty Coverage:
Lifetime Limited Warranty
50 Year Hail Protection
35 Year Chalk and Colour Change Protection

Please see detailed product directory for accessory information. For metric, unless indicated otherwise, all measurements are in millimeters (mm).

SOFFIT AND FASCIA SYSTEMS

VINYL SOFFIT SYSTEMS

Performance-engineered for enduring beauty, soffit and fascia add the perfect finishing touch to rooflines, gables and trim while providing essential ventilation that removes moisture from eaves and rafters.



12" T-4 Solid Soffit/
Vertical Siding

12" T-4 Vented

Sequoia Select Ultra-Premium

12" T-4
Nominal Thickness: .044"
Texture: Matte
12" Exposure per Panel (304.8)
12' Length (3658)
Hidden dual vent slots
10 sq. in. ventilation per lineal ft.

Packaging:
16 pcs. per ctn.
1.92 sqs. per ctn. (17.8 m²)



10" D-5 Solid Soffit/
Vertical Siding

10" D-5
Fully Vented

Oxford Premium

10" D-5
Nominal Thickness: .042"
Texture: Light Roughsawn
10" Exposure per Panel (254)
12' Length (3658)
5.3 sq. in. ventilation per lineal ft.

Packaging:
20 pcs. per ctn.
2 sqs. per ctn. (18.6 m²)

Oxford Premium solid profile is also available in 10' length.



8" Solid Soffit

8" Vented

Beaded Premium

8" Panel
Nominal Thickness: .042"
Texture: Matte
8" Exposure per Panel (203.2)
12' 6" Length (3810)
2.4 sq. in. ventilation per lineal ft.

Packaging:
12 pcs. per ctn.
1 sq. per ctn. (9.29 m²)

Beaded Premium is available in Snow White, Linen, Wicker, Canyon Clay, Pebble and Monterey Sand only. Note: EZ Lock 8" D-5 solid and vented soffit is offered in Snow White, Linen, Wicker and Black.



12" T-4 Solid Soffit/
Vertical Siding

12" T-4
Centre Vented
(Available in Snow White only.)

Fairweather

12" T-4
Nominal Thickness: .040"
Texture: Brushed
12" Exposure per Panel (304.8)
12' Length (3658)
Centre Vented = 2.3 sq. in. ventilation per lineal ft.
Fully Vented = 7.1 sq. in. ventilation per lineal ft.

Packaging:
16 pcs. per ctn.
1.92 sqs. per ctn. (17.8 m²)



12" T-4
Fully Vented



Classic Colours

Snow White	Monterey Sand
Sandstone	Pearl
Linen	Dover Gray
Almond	Storm†
Maize	Chesapeake Gray†
Wicker	Sage
Canyon Clay	Juniper Grove
Pebble	

Designer Colours

Musket Brown	Black**
--------------	---------

†Available in Oxford Premium and Fairweather soffit only. **Available in Oxford Premium and EZ Lock soffit only. Musket Brown and Black are for soffit use only, not vertical siding.

ALUMINUM SOFFIT AND FASCIA

Gentek aluminum soffit panels features a distinctive V-groove design for extra strength and rigidity, and lock together easily for a fast, professional finish.

Classic Colours

Bright White	Pearl
Rainware White	Dover Gray
Ice White	Storm
White 701	Chesapeake Gray
Sandstone	Slate
Cashmere	Sage
Almond	Ivy Green
Maize	Wedgewood Blue
Wicker	Old World Blue
Canyon Clay	AluCopper
Pebble	Burgundy
Sandalwood	Nutmeg
Monterey Sand	Chestnut Brown
Tan	Commercial Brown
Brownstone	Antique Brown
Sable	Graphite
Metallic Gray	Black

Designer Colours

Majestic Brick	Midnight Surf
Dark Drift	Marine Dusk
Rockport Brown	Meadow Fern
Espresso	Moonlit Moss
Smoked Timber	Hudson Slate
Rockwell Blue	Windswept Smoke
Coastal Blue	Iron Ore

Not all products and colours are available at all locations. Please check with your local Gentek branch for product availability.



16" 2-Panel Solid

16" 2-Panel Vented

16" 2-Panel Soffit

Available in Heavy Gauge and Standard Gauge
 Texture: Smooth
 16" Exposure per Panel (406.4)
 12'1"-15'16" Length (3708)
 4.02 sq. in. ventilation per lineal ft.
 Heavy Gauge, 12 pcs. per ctn.
 Standard Gauge, 18 pcs. per ctn.




16" 4-Panel Solid

16" 4-Panel Vented

16" 4-Panel Soffit

Available in Heavy Gauge and Standard Gauge
 Texture: Smooth
 16" Exposure per Panel (406.4)
 12'2"-3'8" Length (3718)
 4.12 sq. in. ventilation per lineal ft.
 Heavy Gauge, 18 pcs. per ctn.
 Standard Gauge, 18 pcs. per ctn.

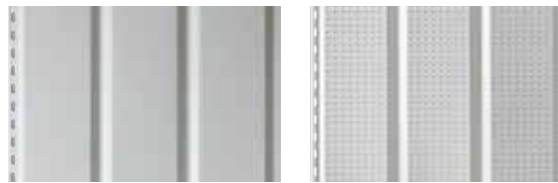

18" 3-Panel Solid

18" 3-Panel Vented

18" 3-Panel Soffit

Heavy Gauge
 Texture: Smooth
 18" Exposure per Panel (457.2)
 10' Length (3048)
 5.46 sq. in. ventilation per lineal ft.
 12 pcs. per ctn.



4" Fascia, Ribbed; available in Standard and Economy



6" Fascia, Ribbed; available in Standard, Economy and Heavy Gauge



8" Fascia, Ribbed; available in Standard and Heavy Gauge



10" Fascia, Ribbed; Standard Gauge

4", 6", 8" and 10" Ribbed Fascia

4" (101.6), 6" (152.4), 8" (203.2), 10" (254)

Texture: Smooth
 9'10" Length (3000)
 Ribbed


4" fascia, 30 pcs. per ctn.
 6", 8", 10" fascia, 20 pcs. per ctn.

Note: 6" and 8" Fascia also available in Heavy Gauge Ribbed, 20 pcs. per ctn., and Heavy Gauge Plain, 25 pcs. per ctn.

RAINWARE PRODUCTS

A QUALITY FINISH FROM EVERY ANGLE

Built of corrosion-resistant aluminum, Gentek rainware products will not rot, rust or warp. A tough, baked-on paint finish resists flaking, peeling and blistering to ensure years of maintenance-free performance.

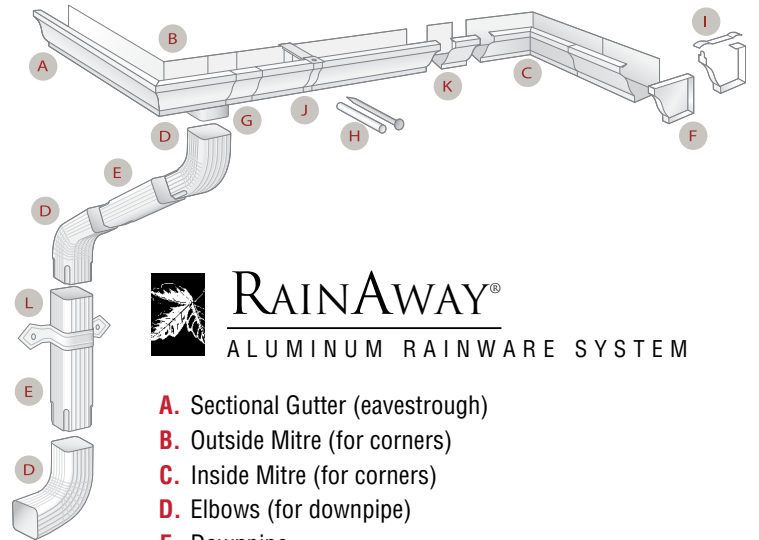

RAINAWAY®

ALUMINUM RAINWARE SYSTEM

- A.** Sectional Gutter (eavestrough)
- B.** Outside Mitre (for corners)
- C.** Inside Mitre (for corners)
- D.** Elbows (for downpipe)
- E.** Downpipe
- F.** End-Caps (for gutter)
- G.** Outlet Tube (to connect gutter and downpipe)
- H.** Spikes
- I.** Fascia Bracket
- J.** Gutter Bracket
- K.** Slip Joint Connectors
- L.** Pipestraps

GUTTER GUARDS

Gentek carries a wide selection of gutter guards, including Alu-Rex quality products.



alu-r^{ex}





CHAMCLAD® PVC SIDING, SOFFIT, CEILING AND TRIM


More than a cladding system, ChamClad architectural panels offer green and sustainable strategies for the built environment. Manufactured from recycled rigid PVC, the panels are cost effective and easy to install, and provide superior durability and impact resistance.



- Made in Canada from recycled rigid PVC; LEED compliant and CCMC certified
- A beautiful solution for a wide range of applications including siding and soffit, beams and pillars, interior walls and ceilings
- One of the most realistic finishes on the market with matte and texturized patterns
- Stay-true colours that offer superior UV protection, weather resistance and colour stability
- Quality finishes protect against heat buildup and are scratch- and graffiti-resistant
- Easy installation – no special tools or caulking required
- One profile offers two looks: V-Groove or U-Channel
- Products available on CAD Details and Specpoint
- Choose from a full selection of colours, trim and accessories



Exterior Panels




6" Soffit Panel

6" Wall Panel

12" Seamless Wall Panel

Interior Panels



4" Wall & Ceiling Panel

6" Wall & Ceiling Panel

12" Seamless Wall & Ceiling Panel

QUALITY STONE

EASY-INSTALL PANELS BY INSTONE

EXCLUSIVELY AT GENTEK

FAUX STONE WITH NATURAL BEAUTY

Quality Stone captures your attention with deep textures and stone spacing that achieve a seamless and realistic appearance.

**INTERIOR
EXTERIOR
APPLICATIONS**



- Tongue and groove panel ensures a highly secure fit
- Easy to install; can be accomplished using common tools
- Durable, all-climate, no-maintenance product
- Made with energy-saving, high-density polyurethane
- The only faux stone that uses Climate Shield, one of the most advanced colour coatings in the industry
- Pillars and accessories complete the design

Stacked Stone




Stucco



Primed and ready for paint.

Ledge Stone

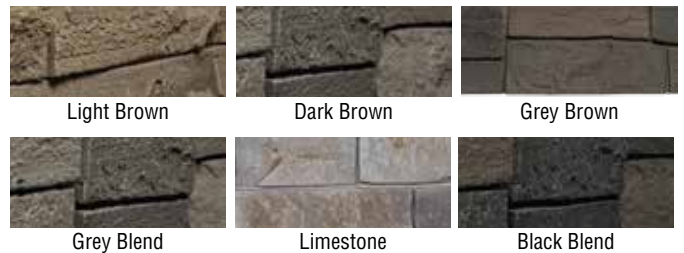

Ridge Stone



Modern Brick



DISTINCTION


REVÊTEMENT D'ACIER ARCHITECTURAL - ARCHITECTURAL STEEL SIDING

MODERNO

REVÊTEMENT D'ACIER ARCHITECTURAL - ARCHITECTURAL STEEL SIDING

THE ELEGANCE OF WOOD WITHOUT THE MAINTENANCE

Distinction and Moderno steel sidings merge the strength of steel with organic beauty for a superior home exterior.

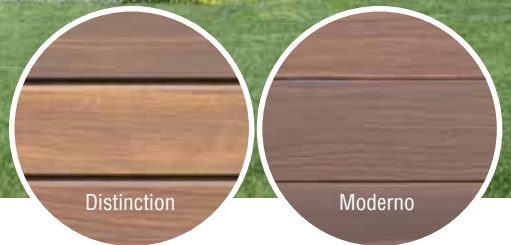

- High-performance painting process provides rust prevention
- UV-resistant paint prevents discolouration and cracking
- Fire and weather resistance
- Full line of matching accessories for an authentic look
- Low maintenance
- Concealed fasteners leaving no visible seams and joints
- Easy installation; installs vertically or horizontally
- Tested in accordance with ASTM E330 – Standard Test Method for Structural Performance

Wood Shade Series



Granite Series



Graphite Grey



Jet Black

Metallic Series



Metallic Silver





ALUMINUM PANELS WITH ORGANIC VISUAL APPEAL

Realistic-looking woodgrain finishes and colours make Longboard a standout selection for upscale residential applications. This high-performance cladding recreates the natural beauty and richness of wood but without the maintenance.



- Available in 12' or 24' lengths in 40+ standard finishes; custom colour matching also offered
- 100% recyclable and 100% non-combustible
- Long-lasting – won't rot, warp, peel or mould
- 15- or 20-year warranty



Light Cherry



Western Cedar



Dark National Walnut



Dark Fir



Light National Walnut



Dark Walnut



Dark Cherry



Table Walnut

THE AUTHENTIC LOOK AND FEEL OF CEDAR

With superior dimensional strength and durability, Everlast composite siding achieves the perfect mix of natural-looking wood elegance and carefree upkeep.



- Extremely durable mineral composite siding with polymer resins and acrylic colorants
- Highly UV-resistant acrylic capstock with authentic CedarTouch[®] finish
- Never requires caulking or painting
- Superior wind, hail and impact resistance
- Will not support combustion
- Virtually impervious to water; ideal for coastal and freeze/thaw environments
- Superior dimensional stability for reduced expansion and contraction
- Available in 4-1/2" and 7" Lap siding and 11" Board & Batten profiles



11" Board & Batten not available in Harbor Blue, Willow, Spanish Moss, Antique Ivory or Slate.

SHAKES AND SHINGLES

MAKE A STATEMENT OF STYLE

Our superb collection of shakes and shingles combines the best of both worlds – the beauty of nature and the power of technology. The authentic profile designs and authentic textures achieve the character and charm of handcrafted wood in a high-performance polymer construction.



Colour Palette

Snow White	Dover Gray	Meadow Fern
Sandstone	Storm	Moonlit Moss
Linen	Chesapeake Gray	Rockwell Blue
Almond	Sage	Coastal Blue
Maize	Juniper Grove	Midnight Surf
Wicker	Majestic Brick	Marine Dusk
Canyon Clay	Dark Drift	Hudson Slate
Pebble	Rockport Brown	Windswept Smoke
Monterey Sand	Espresso	Iron Ore
Pearl	Smoked Timber	

Not all colours available in all profiles; see your Gentek representative for details.



Grayne Engineered Composite Shingles replicate the natural colour variances and woodgrain patterns of genuine cedar for high-style warmth and appeal.

Colour Palette

Cape Grey	Autumn Shade	Lakeside Blue
Ridge Moss	Aspen Brown	Mountain Ash
Rustic Slate	Treated Cedar	Aged Grey
Harvest Shade	Heritage Grey	

Not all colours available in all profiles; see your Gentek representative for details.



Split Shake Staggered Shake Round Shingle Perfection Shingle



5" White Cedar Shingle 7-1/2" Red Cedar Shingle



Versetta Stone®

The beauty of stone, the simplicity of siding™

THE SIGNATURE LOOK OF STONE

Create the high-end style of traditional stone masonry but without the excess cost and installation time. Versetta Stone combines handcrafted beauty with modern practicality in a non-structural, cement-based panelized stone veneer.

SPECIALTY

INTERIOR
EXTERIOR
APPLICATIONS



- Cast in moulds and hand-coloured with iron oxide pigments to replicate natural stone shapes, textures and patterns
- Lightweight and easy to install with tongue and groove interlocking system; installs in virtually any weather
- Designed to effectively manage moisture to help prevent mould growth
- Ideal for exteriors, interiors, new construction and remodel projects
- Tested and approved to rigorous building standards
- NAHB Green Approved Product

Choose from Ledgestone or Tight-Cut profiles in a variety of colours.



Ledgestone panel shown in Plum Creek.



Tight-Cut panel shown in Sterling.



Plum Creek



Sterling



Mission Point



Terra Rosa



Northern Ash



FOR EVERY HOME, EVERY STYLE


Featuring a wide variety of textures and profiles, this sleek, strong and non-combustible fiber cement panel offers custom-crafted design appeal for any style home.




- Beautiful, durable and highly weather-resistant
- ColorPlus® Technology for long-lasting colour
- Engineered for Climate® to meet specific climate demands
- Hardie Trim Boards available in smooth and woodgrain textures, batten boards and crown moulding



Hardie Plank Lap Siding
Select Cedarmill




Hardie Plank Lap Siding
Smooth




Hardie Plank Lap Siding
Beaded Cedarmill



Hardie Plank Lap Siding
Beaded Smooth



Hardie Shingle Siding
Staggered Edge Panel



Hardie Shingle Siding
Straight Edge Panel

BLOCKS, VENTS, SHUTTERS AND COLUMNS

IMPECCABLE FORM AND FUNCTIONALITY

Our columns, shutters, blocks and vents lend the perfect finishing touch to any home exterior. Masterfully crafted with attention to detail, this ample selection will cover your every design need with a premium finish.





REGENCY 400 SERIES

VINYL REPLACEMENT WINDOWS

NEXT-GENERATION ENERGY EFFICIENCY**

With meticulous attention to every detail, Regency 400 Series merges modern style with advanced technology to achieve superior energy efficiency, enduring beauty, easy upkeep and excellent value.



Ask about EnergyPlus™ QUATTRO insulated glass packages to meet ENERGY STAR® requirements.



SUPERIOR PERFORMANCE IS INHERENT IN THE DESIGN

Energy-engineered Regency 400 Series replacement windows are expertly crafted to improve the energy efficiency of a home while enhancing its appearance with an upscale, contemporary look. The superb construction features an extra-strong 4-1/2" thick fusion-welded frame with the sash positioned closer to the interior part of the wall for improved thermal protection.

- Heavy-duty 4-1/2" welded rigid vinyl multi-chamber frame construction
- Welded sashes with triple weatherstripping for superior insulation
- 7/8" thick (nominal) double-glazed glass units with Low-E, argon and Super Spacer® structural foam spacer (standard)
- Triple-glazed units up to 1-3/8" thick (nominal) with Low-E and argon² or krypton for ultra energy efficiency (optional)
- EnergyPlus™ QUATTRO, EnergyPlus and Solar Shield glass packages available
- A recyclable material with a long service life, vinyl windows are built with manufacturing efficiencies that help reduce waste
- Contemporary sash for a modern look
- Decorative grids, specialty glass and installation accessories



Casement



Awning



Slider



Double Hung



Single Hung

Frame Colours

Nordic White – extruded	Dover Gray
Cream	Storm
Almond	Slate
Maize	Windswept Smoke
Wicker	Chestnut Brown
Canyon Clay	Commercial Brown
Pebble	Espresso
Sandalwood	Graphite
Brownstone	Iron Ore
Dark Drift	Black
Sable	

Available in extruded Nordic White; exterior colour options include 20 standard paint colours and custom hues. Interiors are Nordic White; an optional Black painted interior finish also is offered³





Regency®

HIGH-PERFORMANCE WINDOWS

ENERGY-SAVING SOLUTIONS DESIGNED FOR NORTHERN CLIMATES

For many homeowners, conserving energy and reducing fuel costs is a primary reason for purchasing new windows – and that’s why superior thermal efficiency is at the core of our Regency window design.



Ask about EnergyPlus™ QUATTRO insulated glass packages to meet ENERGY STAR® requirements.

ULTRA-PREMIUM



EXCEPTIONAL STRENGTH, ENDURING STYLE

Precision-engineered for outstanding thermal efficiency, Regency windows incorporate several design features to ensure an exceptionally strong and weathertight fit, as well as energy savings and a markedly refined appearance.

- Fusion-welded masterframe and sash corners
- Beveled exterior masterframe accommodates various installation methods and architectural styles
- Metal-reinforced sash
- Double-glazed EnergyPlus glass with Low-E, argon gas and Super Spacer structural foam spacer
- Optional EnergyPlus QUATTRO, EnergyPlus and Solar Shield glass packages available

CREATE CUSTOM APPEAL

- Available in extruded White – with exterior colour options featuring 20 standard paint colours and a wide variety of custom hues
- Window interiors are extruded White; an optional Black painted interior finish also is offered³
- Decorative grids and specialty glass
- Jamb extensions, brickmoulds and installation accessories



Hopper Window



Basement Window



Awning



Slider



Casement



Double Hung



Single Hung

80 Series

FUSION-WELDED VINYL WINDOWS

DESIGNED FOR YEAR-ROUND ENERGY SAVINGS

Featuring a premium vinyl construction, fusion-welded technology and high-performance glass, 80 Series windows will exceed your every expectation for energy efficiency, quality and value.



Ask about EnergyPlus™ QUATTRO insulated glass packages to meet ENERGY STAR® requirements.



STYLISH AND STRONG

In 80 Series, you have discovered a window that will improve the energy efficiency of a home while enhancing its appearance, inside and out. Heavy-duty vinyl frames and sashes, multi-chambered extrusions and high-performance insulating glass achieve outstanding energy efficiency. Together, with its superior durability and structural integrity, this premiere vinyl window is as strong as it is beautiful.

- Fusion-welded frame and sashes
- Sturdy 3-3/8" frame depth
- Also available in 1" set back nail fin and stucco flange options
- 1" thick (nominal) insulated glass unit with Intercept® warm-edge spacer; optional structural foam spacer
- Side-load sash design (single-hung windows) and removable fiberglass screens for easy cleaning
- Metal reinforcement in the meeting rails for increased strength and rigidity
- Optional EnergyPlus QUATTRO and EnergyPlus glass packages available
- Choose extruded White, Almond or Desert Clay; optional exterior finish colours include Black, Architectural Bronze and Silver (Desert Clay base not available with exterior colour finishes)

INSTALLATION EASE

80 Series windows come standard with a 1-3/8" nail fin. For enhanced appearance and ease of installation, three additional options – 1" set back nail fin, stucco fin and a block frame – also are offered.



1-3/8" Nail Fin (standard)



1" Set Back Nail Fin



Stucco Fin



Block Frame

70 Series

FUSION-WELDED VINYL WINDOWS

QUALITY

IMPRESSIVE PERFORMANCE

Our 70 Series windows will add the perfect touch of refinement to any home with their quality construction, enduring good looks and low-maintenance features.



Available
only in
**WESTERN
CANADA.**

BEAUTIFUL, DURABLE AND ENERGY EFFICIENT

Gentek 70 Series windows deliver a weathertight fit to help conserve energy use year-round, while enhancing the appearance of a home inside and out.

- Fusion-welded vinyl frame and sashes
- 2-5/8" frame depth for multiple applications
- 3/4" thick (nominal) insulated glass unit promotes energy savings
- Intercept spacer or optional structural foam spacer
- Metal reinforcement in the meeting rails for increased strength
- Available in White, Almond and Desert Clay

AMHERST™

VINYL REPLACEMENT WINDOWS

QUALITY

ENERGY-SMART AND VALUE-PRICED

Amherst windows combine beauty and energy efficiency with everyday affordability. The fusion-welded masterframe and sashes and high-performance glass system together create a strong thermal barrier against energy loss.



QUALITY DESIGN AND CONSTRUCTION

Built in the tradition of quality, Amherst windows deliver impressive performance and energy efficiency, as well as beauty and value.

- Fusion-welded frame and sashes
- Energy HSG insulated glass unit with Intercept spacer system
- Interlocking composite-reinforced sash meeting rails
- Bulb seal at the meeting rails for enhanced thermal performance
- Beveled exterior profile and sloped sill
- Available in White and Beige

FIRST IMPRESSIONS


By Gentek

CREATE A DRAMATIC FOCAL POINT

A beautiful entry door makes a powerful statement of style for any exterior design. Choose from a wide selection of First Impressions by Gentek entry doors in styles that fit every design and budget.



First Impressions by Gentek doors can be customized with decorative glass and hardware for a distinctive design with custom appeal.

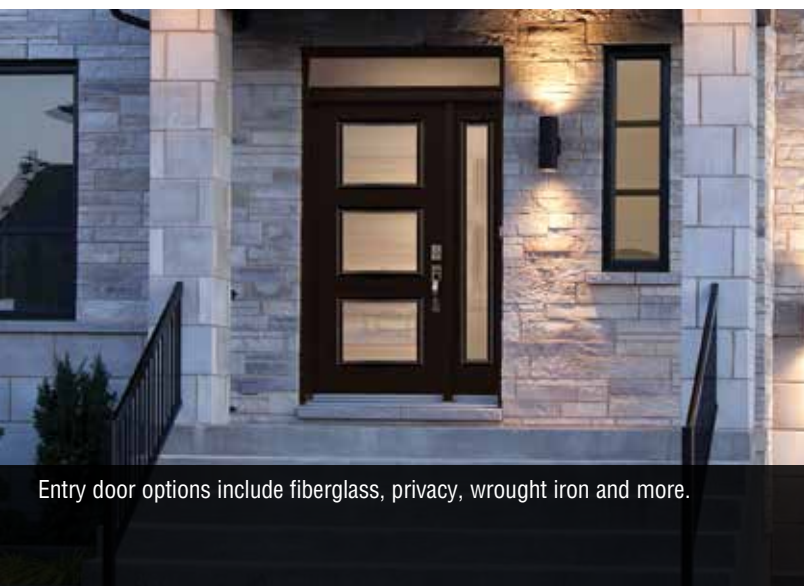

Entry door options include fiberglass, privacy, wrought iron and more.



Our contemporary classics, craftsman and rustic door collections will complement any architectural style.

PATIO DOORS

EXPERTLY BUILT FOR SUPERIOR PERFORMANCE

Each door in our versatile collection features a heavy-duty construction, superb design and easy-care features for long-lasting quality and performance.



STORM DOORS

PRACTICAL AND STRONG

Gentek offers a full line of expertly crafted storm doors to protect entry areas from inclement weather. Our storm doors also are ideally suited for patio enclosures, providing easy access as well as a substantial weather shield.



BUILDING ENVELOPE, SEALANTS AND FOAM

Ensure your renovation and new construction projects are securely protected. Our full selection of insulation, sealants and foam provides essential barriers against moisture and air penetration, energy loss and other elements.

BUILDING ENVELOPE AND INSULATION

Choose from leading brands in building envelope systems and insulation materials, including HomeGuard and Titan housewraps, and EnergyShield wall insulation.



EnergyShield
Continuous Wall Insulation



SEALANTS AND FOAM

Finish the job off right with high-quality sealants and foam, such as Mulco® sealants and Lepage QUAD Foam.




TOOLS AND EQUIPMENT

Having the right tools and equipment for the job is essential for a professional installation. At Gentek, you'll find everything you need, such as Malco® tools, brakes and gutter equipment from Tapco® and Van Mark, and a wide selection of ladders.

EQUIPMENT

Our full selection of brakes and gutter equipment from Van Mark and Tapco, along with Werner® ladders and scaffolds, makes it easy to get all everything you need in one convenient stop.

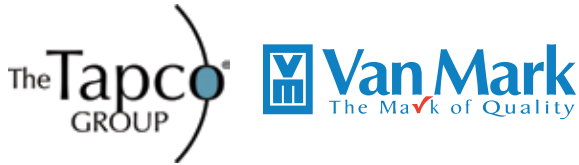

TOOLS

Gentek carries a wide range of installation tools, including the popular Malco brand, for home exterior renovations and new construction projects.



ALIGN COMPOSITE CLADDING AND SEQUOIA SELECT ENFUSION COLOUR MATRICES

• Available in this colour.

	Colour Palette																				
	01 Snow White	632 Almond	872 Chesapeake Gray	625 Coastal Blue	655 Dark Drift	127 Dover Gray	873 Hudson Slate	642 Iron Ore	876 Majestic Brick	877 Marine Dusk	874 Meadow Fern	652 Midnight Surf	673 Monterey Sand	653 Moonlit Moss	628 Pebble	875 Rockport Brown	637 Rockwell Blue	878 Smoked Timber	631 Storm	651 Windswept Smoke	Universal
ALIGN Cladding																					
7" Plank	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Accessories																					
CP001 2-1/2" Steel Starter Strip																					•
CP002 Finish Trim																					•

	Classic Colours										Designer Colours						Neutral
	001 Snow White	632 Almond	010 Canyon Clay	872 Chesapeake Gray	127 Dover Gray	628 Pebble	624 Sage	631 Storm	638 Wicker	655 Dark Drift	873 Hudson Slate	874 Meadow Fern	652 Midnight Surf	653 Moonlit Moss	637 Rockwell Blue	651 Windswept Smoke	Neutral
Sequoia Select EnFusion																	
Double 5" Dutch Lap	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Double 6" Clapboard	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Accessories																	
65604 4" Outside Corner Post w/ Foam	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
65606 1-1/4" J-Channel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
K661945 Easy Start Starter Strip																	•

VINYL TRIM AND ACCESSORIES COLOUR MATRIX

• Available in this colour.

	Classic Colours														Designer Colours																	
	001 Snow White	632 Almond	616 Amber	010 Canyon Clay	872 Chesapeake Gray	127 Dover Gray	633 Juniper Grove	012 Linen	002 Maize	673 Monterey Sand	006 Pearl	628 Pebble	624 Sage	640 Sandstone	631 Storm	638 Wicker	625 Coastal Blue	655 Dark Drift	636 Espresso	873 Hudson Slate	642 Iron Ore	876 Majestic Brick	877 Marine Dusk	874 Meadow Fern	652 Midnight Surf	653 Moonlit Moss	875 Rockport Brown	637 Rockwell Blue	878 Smoked Timber	651 Windswept Smoke	Neutral	
65504 3-1/2" Outside Corner Post (OCP)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
65524 3-1/2" OCP – Dark Colours																	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
65501 3" Outside Corner Post	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
65507 6" Designer Outside Corner Post	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
65520 Inside Corner Post	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
65521 Inside Corner Post – Dark Colours																	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
65560 1/2" J-Channel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
65536 5/8" Premium J-Channel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
65533 3/4" Premium J-Channel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
65606 1-1/4" J-Channel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
65538 2-1/2" Wide Face J-Channel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
65570 Undersill Trim	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
65571 Undersill Trim – Dark Colours																	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
67750 Double Undersill Trim	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
65581 Drip Cap	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
65700 Surround Starter	•																															
65551 Starter Strip																																•
65599 F-Channel	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
68080 3/4" F-Channel	•																															
65568 3/8" Soffit Cove J-Channel	•																															
65548 Soffit Double Channel	•																															
68030 Bay & Bow Outside Corner Post	•																															
68020 Beaded Corner Post w/insulation	•																															
65583 3-1/2" Window/Door Surround	•	•						•						•																		
65750 5" Window/Door Surround	•																															

ALUMINUM AND STEEL SIDING, AND ALUMINUM SOFFIT AND FASCIA COLOUR MATRICES

• Available in this colour.

Colour Palette	Deluxe Aluminum				Woodgrain 2000			
	8" Horizontal	Double 4" Clapboard	8" Vertical Board & Batten	Vertical "V"	8" Horizontal	Double 4" Clapboard	Double 4" Dutch Lap	8" Vertical Board & Batten
431 Bright White	•	•	•	•	•	•	•	•
429 Ice White				•				•
432 Almond	•	•	•	•	•	•	•	•
425 Black				•				•
471 Brownstone	•	•	•	•	•	•	•	•
410 Canyon Clay	•	•	•	•	•	•	•	•
5C1 Chesapeake Gray	•	•	•	•	•	•	•	•
454 Chestnut Brown	•	•	•	•	•	•	•	•
462 Commercial Brown	•	•	•	•	•	•	•	•
457 Dark Drift	•	•	•	•	•	•	•	•
436 Dover Gray	•	•	•	•	•	•	•	•
5C2 Hudson Slate	•	•	•	•	•	•	•	•
4P6 Iron Ore	•	•	•	•	•	•	•	•
402 Maize	•	•	•	•	•	•	•	•
459 Pebble	•	•	•	•	•	•	•	•
447 Sable	•	•	•	•	•	•	•	•
408 Sandalwood	•	•	•	•	•	•	•	•
440 Sandstone	•	•	•	•	•	•	•	•
423 Slate	•	•	•	•	•	•	•	•
470 Storm	•	•	•	•	•	•	•	•
407 Tan	•	•	•	•	•	•	•	•
438 Wicker	•	•	•	•	•	•	•	•
406 Windswept Smoke	•	•	•	•	•	•	•	•

Gentek offers a wider range of colours in Aluminum but with higher minimum quantities. Please check with your local Gentek distributor for enhanced colour line up and minimum order quantities.

	Colour Palette												
Sierra Steel with Kynar PVDF	431 Bright White	796 Chelsea Bluff	795 Delray Sand	836 Dover Gray	4P6 Iron Ore	633 Juniper Grove	673 Monterey Sand	637 Rockwell Blue	712 Sable	470 Storm	793 Taylor Red	826 Thisite	714 Watermill Blue
Double 4" Clapboard	•	•	•	•	•	•	•	•	•	•	•	•	•
Double 5" Clapboard	•	•	•	•	•	•	•	•	•	•	•	•	•
8" Horizontal	•	•	•	•	•	•	•	•	•	•	•	•	•
12" Vertical Board & Batten	•	•	•	•	•	•	•	•	•	•	•	•	•

Colour Palette	Aluminum Soffit					Aluminum Fascia									
	16" 2-Panel Standard Gauge	16" 2-Panel Heavy Gauge	16" 4-Panel Standard Gauge	16" 4-Panel Heavy Gauge	18" 3-Panel Heavy Gauge	4" Standard Gauge, Ribbed	4" Economy Gauge, Ribbed	6" Standard Gauge, Ribbed	6" Economy Gauge, Ribbed	6" Heavy Gauge, Ribbed	6" Heavy Gauge, Plain	8" Standard Gauge, Ribbed	8" Heavy Gauge, Ribbed	8" Heavy Gauge, Plain	10" Standard Gauge, Ribbed
431 Bright White	•					•	•	•	•	•	•	•	•	•	•
429 Ice White	•														
430 Rainware White															
86 White 701				•	•										
432 Almond			•	•	•										
475 AluCopper		•													
165 Antique Brown	•	•													
425 Black	•	•	•	•	•										
471 Brownstone	•	•	•	•	•										
467 Burgundy	•	•	•	•	•										
410 Canyon Clay	•	•	•	•	•										
414 Cashmere	•	•	•	•	•										
5C1 Chesapeake Gray	•	•	•	•	•										
454 Chestnut Brown	•	•	•	•	•										
462 Commercial Brown	•	•	•	•	•										
436 Dover Gray	•	•	•	•	•										
5P5 Graphite	•	•	•	•	•										
422 Ivy Green	•	•	•	•	•										
402 Maize	•	•	•	•	•										
5P4 Metallic Gray	•	•	•	•	•										
5P8 Monterey Sand	•	•	•	•	•										
468 Nutmeg	•	•	•	•	•										
442 Old World Blue	•	•	•	•	•										
434 Pearl		•													
459 Pebble	•	•	•	•	•										
447 Sable	•	•	•	•	•										
417 Sage	•	•	•	•	•										
408 Sandalwood	•	•	•	•	•										
440 Sandstone	•	•	•	•	•										
423 Slate	•	•	•	•	•										
470 Storm	•	•	•	•	•										
407 Tan	•	•	•	•	•										
435 Wedgewood Blue	•	•	•	•	•										
438 Wicker	•	•	•	•	•										
5P9 Coastal Blue	•	•	•	•	•										
457 Dark Drift	•	•	•	•	•										
5P3 Espresso	•	•	•	•	•										
5C2 Hudson Slate	•	•	•	•	•										
4P6 Iron Ore	•	•	•	•	•										
5C5 Majestic Brick	•	•	•	•	•										
5C6 Marine Dusk	•	•	•	•	•										
5C3 Meadow Fern	•	•	•	•	•										
409 Midnight Surf	•	•	•	•	•										
413 Moonlit Moss	•	•	•	•	•										
5C4 Rockport Brown	•	•	•	•	•										
5P2 Rockwell Blue	•	•	•	•	•										
4C7 Smoked Timber	•	•	•	•	•										
406 Windswept Smoke	•	•	•	•	•										

ALUMINUM TRIM, FLAT STOCK, GUTTER COIL AND STEEL ACCESSORIES COLOUR MATRICES

• Available in this colour.

	Colour Palette																																						
	431	429	430	432	475	165	425	322	471	467	410	414	4C1	454	462	436	456	4P5	422	401	402	4P4	4P8	468	442	459	447	417	408	440	423	470	407	435	438				
	Bright White	Ice White	Rainware White	Almond	AluCopper	Antique Brown	Black	Bright Red	Brownstone	Burgundy	Canyon Clay	Cashmere	Chesapeake Gray	Chestnut Brown	Commercial Brown	Dover Gray	Forest Green	Graphite	Ivy Green	Lambeth Beige	Maize	Metallic Gray	Monterey Sand	Nutmeg	Old World Blue	Pebble	Sable	Sage	Sandalwood	Sandstone	Slate	Storm	Tan	Wedgewood Blue	Wicker				
2550 Snap-Lock Sill Trim	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
0109025 Universal Starter Strip				•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
2502 3/4" J-Trim	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
2312 Outside Corner Post (Woodgrain)	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
2319 Outside Corner Post (Smooth)	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
2503 Universal J	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
2538 L-Trim Small	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
2543 Drip Cap	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
2504 Undersill Trim	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
2567 Roof Edge Drip Cap	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
2573 Roof Edge 3" 0 Degree 9'10"	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
2575 Roof Edge 4" 0 Degree 9'10"	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
2577 Roof Edge 6" 0 Degree 9'10"	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
2043 Woodgrain Fascia Trim (BSP)	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
2300 Individual Corner Cap	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
2311 Individual Corner Cap Woodgrain	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
2520 Soffit J (BSP)	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
2507 3/4" Wideface Soffit J	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
2522 Soffit J (OSP)	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
1692 Channel Runner	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
1690 Channel Runner	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Aluminum Flat Stock																																							
3036 24" x 50' (BSP) Heavy Gauge	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
3037 24" x 98' 1/2" (BSP)	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
3039 24" x 98' 1/2" (OSP)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
3304 24" x 50' (BSP)	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
3531 24" x 98' 1/2" (BSP)	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
3311 PVC Striated 24" x 50' (OSP)	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Aluminum Gutter Coil																																							
3025 Downpipe Coil 10-1/2" (OSP)		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
3006 Gutter Coil 11-7/8" (OSP)			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
3009 Gutter Coil 11-7/8" (BSP)			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
3045 Gutter Coil 11-7/8" (OSP) Heavy Gauge			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
3049 Gutter Coil 11-7/8" (BSP) Heavy Gauge			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
3012 Gutter Coil 13-1/2" (BSP)			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
3084 Gutter Coil 6" (BSP)			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

ARCHITECTURAL SPECIFICATIONS

COMPOSITE CLADDING ARCHITECTURAL SPECIFICATIONS

GENTEK ALIGN COMPOSITE CLADDING

PHYSICAL DATA:

Colour Uniformity is spectrophotometrically controlled
 Emboss Cedar mill grain
 Gloss Uniform low gloss maintained with a 75° gloss meter

PRODUCT TEST DATA:

Impact Resistance	57 inch lbs
Coefficient of Linear Expansion (in/in/°F)	2.3 x 10 ⁻⁵
Thermal Resistance	R-value 2.0*
ASTM D3345, Termite Resistance	Complete resistance
ASTM D5206-13, Windload Resistance (16" OC nails, 1-1/4" penetration)	53 psf (180 mph/290 km/h)

*When installed directly over sheathing.

FIRE RESISTANCE:

ASTM E84 - Class A	Flame spread index ≤25
ASTM E119 Rated Assemblies	Smoke developed index ≤450
ASTM D635, Rate of Burn	Approved for use
ASTM D1929, Self-Ignition/Flash-Ignition Temperature	No self-sustained burn
NFPA 268, Section 1406 of IBC	770°F (410°C)
	Approved for use

CODES AND REGULATORY COMPLIANCE:

Intertek Code Compliance Research Report #0316
 ICC-ES Evaluation Report – ESR 4449
 Florida Product Approval #31747

WARRANTY:

Gentek backs ALIGN with a lifetime limited warranty to the original homeowner; the warranty is transferable if the home is sold.

THREE-PART FORMAT SPECIFICATION:

Long-form specification in three-part format is available at ALIGNCompositeCladding.com.

VINYL SIDING AND SOFFIT ARCHITECTURAL SPECIFICATIONS

Produced to precise tolerances using formulated compounds specifically designed for the plastic building products industry according to ASTM D4216, meeting or exceeding the following:

Property	ASTM Test	Results
Tensile Strength (psi)	D-638	6,700
Modulus of Elasticity (psi)	D-638	410,000
Izod Impact (70°F)	D-256	3.6 (ft-lb/in of notch)
Izod Impact (32°F)	D-256	2.0 (ft-lb/in of notch)
Flexural Strength (psi)	D-790	14,000
Coefficient of Linear Expansion	D-696	5.3 x 10 ⁻⁵ (mm/mm °C) 2.9 x 10 ⁻⁵ (in/in °F)
Deflection Temperature Under Load 264 psi (°C)	D-648	73

PRODUCT PHYSICALS:

All siding products, soffit panels and accessories are made with solid colour throughout. The siding products and accessories meet or exceed the ASTM Specification for Rigid Poly Vinyl Chloride (PVC) Siding D3679. All soffit products and associated accessories meet or exceed the ASTM Specification for Rigid (Unplasticized) Poly Vinyl Chloride (PVC) Soffit D4477.

The siding and soffit compound meets Class 2 requirements and conforms to weathering performances as described in ASTM 3679.

Colour: Spectrophotometer controlled
 Gloss: Gardner gloss meter controlled
 Lock: Dimensionally controlled

All products meet or exceed ASTM 3679 thickness (nominal) requirements:

Sequoia Select EnFusion	0.046"
Sequoia Select	0.046"
Board & Batten	0.050"
Fair Oaks	0.044"
Concord	0.042"
Driftwood II	0.040"
Sequoia Select Ultra-Premium Soffit	0.044"
Oxford Premium Soffit	0.042"
Beaded Premium Soffit	0.042"
Fairweather Soffit	0.040"

WARRANTY:

All Gentek vinyl siding brands carry a Lifetime Limited Warranty including fade and hail protection. *Warranty is transferable if the home is sold. See printed warranty for complete details.*

SOFFIT VENTILATION AREA:

Gentek soffit panels are designed to allow air circulation into the attic areas to aid in the reduction of excessive heat buildup and water vapor condensation. The net free open area (NFOA) per lineal foot of soffit is as follows:

12" Sequoia Select Ultra-Premium Vented	10 sq in
10" Oxford Fully Vented	5.3 sq in
8" Beaded Vented	2.4 sq in
12" Fairweather Centre Vented	2.3 sq in
12" Fairweather Fully Vented	7.1 sq in

FIRE RESISTANCE RATINGS:

Gentek vinyl siding products meet or exceed all building code requirements throughout the United States and Canada. In addition to meeting these code requirements, Gentek vinyl sidings have been fire rated by Underwriters Laboratories (UL) to be used in one-hour rated designed walls U026 and U032 and a two-hour rated wall, U301. UL inspects the manufacture of the vinyl products quarterly to certify that Gentek vinyl products are manufactured consistently. The vinyl products have been tested as follows:

Property	ASTM Test	Results
Average Burn Distance	D-635	20mm
Average Burn Time	D-635	<5 seconds
Flash Ignition Temperature	D-1929	752°F
Self Ignition Temperature	D-1929	860°F
Flame Spread Index	E-84	15
Smoke Developed Index	E-84	<400
Fire Resistance	E-119	1-hour rated* 2-hour rated*

*See UL Fire Resistance Directory Control No. 1N60. E-119 is equivalent to UL-263 and E-84 is equivalent to UL-723.

Important fire safety information for the building trades, specifiers, professionals and do-it-yourself installers:

When rigid vinyl siding is exposed to significant heat or flame, the vinyl will soften, sag, melt, or burn and may thereby expose the material underneath. Care must be exercised when selecting underlay materials because many underlays are made from organics that are combustible. You should ascertain the fire properties of any underlay prior to installation. All building materials should be installed in accordance with local, state and federal building codes and fire regulations.

WINDLOAD PROPERTIES:

All Gentek siding products are designed to withstand a minimum of 100 mph windloads and are suitable for most areas. The products can be used in areas with higher windloads, but installation procedures, choice of product and building code jurisdiction are important factors to be considered. The windspeed rating (in mph) is calculated using VSI's windspeed calculation guidelines. Additional information is available if required.

BUILDING CODES:

Gentek vinyl products meet or exceed the following building code specifications:
 ICC-ESR – 1133
 New York City MEA 132-94-M
 CCMC – 06541-L
 FHA/HUD Minimum Property Standards

ARCHITECTURAL SPECIFICATIONS

ALUMINUM SIDING ARCHITECTURAL SPECIFICATIONS

ALUMINUM METAL PROPERTIES:

Alloy or equivalent	AA3000
Specific Gravity	2.72
Modulus of Elasticity (ksi)	10,000
Melting Range (°F)	1175-1210

COATING PROPERTIES:

Gentek aluminum products are manufactured with AA3000 series alloy (or equivalent). Both sides of the aluminum are cleaned with a specially formulated cleaner. The cleaned aluminum is then treated with an acid solution containing chrome to enhance corrosion resistance and coating adhesion.

Polyester (Poly) Topcoat: The topside of the pretreated aluminum is coated with a thermoset polyester polymer which is dried and cured at about 450°F, forming a hard but flexible and weatherable coating. Total coating thickness is approximately 18 micrometers.

WEATHERING AND TESTING:

entek products are tested for superior adhesion and forming properties. Gentek's stringent colour specifications allow batch to batch mixing of product. Product testing includes colour, film thickness, gloss, hot water/impact test, freezer/impact test, salt spray, humidity testing (1000 hours) and outdoor exposure (2 years).

COMPLIANCE:

The aluminum alloys used meet the ULC Standard CAN4-S114-M80, defining the noncombustibility of aluminum alloys.

WARRANTY:

40 Year Limited Warranty. Warranty is transferable.

CONTACT WITH DISSIMILAR MATERIALS AND CORROSIVE ENVIRONMENTS:

Direct contact of aluminum products with certain dissimilar materials, or contact with water runoff from dissimilar materials, is likely to result in corrosion. Accordingly, care should be taken during installation to avoid such contact of aluminum with dissimilar materials, including: dissimilar metals (copper, zinc, steel, etc.), concrete, stucco, asbestos siding, pressure treated/pretreated lumber, masonry, corrosive non-metallic materials, and roofing materials or roofing systems containing metallic granules or strips. Seacoast or other corrosive environments may result in corrosion of the product.

NOMINAL GAUGES (mm):

Product	Gauge
8" Horizontal.....	0.53
D4 Dutch Lap.....	0.40
D4 Clapboard	0.40 & 0.44
8" Vertical Board & Batten	0.50
Vertical "V"	0.40
16" Soffit – 2 Panel.....	0.29 & 0.38
16" Soffit – 4 Panel.....	0.29 & 0.38
18" Soffit – 3 Panel.....	0.33
4" Fascia – rib	0.44
6" Fascia – rib & non-rib.....	0.44 & 0.50
8" Fascia – rib & non-rib.....	0.44 & 0.50
Gutter Coil.....	0.57, 0.66 & 0.79

SOFFIT VENTILATION AREA:

Gentek soffit is available in a variety of profiles. Vented panels are designed to allow air circulation into the attic areas to aid in the reduction of excessive heat build-up and water vapour condensation. Gentek soffit conforms to CCMC 12860-L.

PROFILE	PER LINEAR FOOT	PER PANEL
16" – 2 panel	4.02 sq in (25.9 cm ²)	48.7 sq in (314.2 cm ²)
16" – 4 panel	4.12 sq in (26.6 cm ²)	51.25 sq in (330.6 cm ²)
18" – 3 panel	5.46 sq in (35.2 cm ²)	54.6 sq in (352.3 cm ²)

VENTILATION: Fully vented

STEEL SIDING ARCHITECTURAL SPECIFICATIONS

METAL PROPERTIES:

<i>Steel or Equivalent</i>	AZ-50
<i>Specific Gravity</i>	7.8
<i>Minimum Ultimate Strength (KSI)</i>	45-55
<i>Minimum Yield (KSI)</i>	40-50
<i>Minimum Elongation (%)</i>	25-35
<i>Modulus of Elasticity (KSI)</i>	29,500
<i>Coefficient of Thermal Expansion (in/in °F)</i>	0.000006
<i>Melting Range (°F) Steel</i>	>2700
<i>Melting Range (°F) Zinc</i>	786
<i>Thermal Conductivity at 77°F (btu-in/ft²-hr-°F)</i>	555

COATING PROPERTIES:

Gentek steel siding products are manufactured with AZ-50. Both sides of the steel sheet are cleaned with a specially formulated cleaner, water rinsed and then coated with an environmentally safe chemical pretreatment to enhance corrosion protection and coating adhesion.

The pretreated surface is coated with a thermoset corrosion-resistant polymer. This corrosion-resistant polymer is topcoated with the following polymeric systems:

Plastisol (PVC) Topcoat: This highly weatherable, flexible, chemical-resistant thermoplastic polymer is melted and fused at temperatures of >390°F. The coating is applied with a striated pattern or smooth finish having an average film thickness of 3.0 mils.

Fluoropolymer (PVDF): This thermoplastic polymer has excellent chemical and fade resistance. The coating thickness is 0.9 mil. The system is cured at a minimum temperature of 475°F. This polymer system conforms to the high industry standards of Kynar 500® and Hylar 5000®. The main criteria for these standards is that the paint formulation must contain a minimum of 70% PVDF₂. Many fluoropolymer coatings on the market do not meet the high quality and performance standards required by Kynar 500 and Hylar 5000 specifications.

WARRANTY:

All Gentek steel siding brands carry a Lifetime Limited Warranty. *Warranty is transferable if home is sold. See printed warranty for complete details.*

CONTACT WITH DISSIMILAR MATERIALS:

Direct contact of steel products with certain dissimilar materials, or contact with water runoff from dissimilar materials, is likely to result in corrosion. Accordingly, care should be taken during installation to avoid such contact of steel with dissimilar materials, including: dissimilar metals (copper, zinc, steel, etc.), concrete, stucco, asbestos siding, pressure treated/pretreated lumber, masonry, corrosive non-metallic materials, and roofing materials or roofing systems containing metallic granules or strips.

PRODUCT PHYSICALS:

Product	Coating Type	Thickness*
Sierra Steel	PVDF ₂	0.017

*29 Gauge

BUILDING CODES:

Gentek steel products meet or exceed the following building code specifications:

ICC-ES Legacy – Report #97-64

AAMA 1406-86

FHA/HUD Minimum Property Standards

For architectural specifications of specialty siding and other products, please see your local Gentek dealer.



BETTER PRODUCTS FOR A BRIGHTER FUTURE

Conserving energy, reducing waste and recycling materials are just a few ways we can all work together to leave a smaller environmental footprint on the earth. Our ongoing pledge to environmental stewardship continues to grow as we develop solutions that can contribute to a happier, healthier planet:

- As a sustainable material with a long lifespan, vinyl siding and windows help conserve wood and other resources often used in home construction. And because they never need to be painted, they reduce the amount of paint, stain and other maintenance-related products that can harm the earth. According to the Vinyl Siding Institute, throughout its life cycle vinyl siding has 79% less impact on global warming than fiber cement and 85% less impact than brick and mortar.⁴
- Gentek aluminum siding is produced from material that is at least 90% recycled aluminum. At the end of its long useful life, aluminum siding is 100% recyclable.⁵
- Steel is 100% recyclable and has long been North America's most recycled material!⁶ Heavy-duty steel siding also helps energy conservation by creating a tight building envelope to promote efficient heating and cooling performance year-round.

SERVICE AND SELECTION ABOVE ALL

At Gentek, we appreciate the often-challenging schedule of the building products professional. That's why we do our very best to stock our supply centres with everything you need to get the job done efficiently and with beautiful results. Our knowledgeable and friendly staff is readily available to fill your orders, process special requests, offer solutions and assist with whatever you need.

VALUABLE WARRANTY PROTECTION

Gentek delivers the confidence and value only a true leader can provide. We proudly stand behind our products with the full faith of our more than 55 years of manufacturing expertise and some of the strongest warranties in the industry.

For complete warranty information, including limitations, ask your dealer for a copy of the Gentek-brand product warranties. Warranty information for specialty sidings and third-party products can be found on their respective websites.



1001 Corporate Drive | Burlington, ON L7L 5V5
gentek.ca | *Make us a part of your home.*



¹See your Gentek Sales Representative for additional information regarding any questions you might have, or any assertions herein, concerning energy efficiency or savings. Energy savings will vary. ²Insulated glass (IG) units that require capillary tubes may experience some argon gas depletion. ³Optional black painted interior finish is available for casement, awning, special shape and picture windows only; the finish is not covered by the Regency or Regency 400 Series warranty. ⁴Learn more about the sustainability of vinyl siding at www.vinylsiding.org/why-vinyl/sustainability/ (accessed 8-3-22). ⁵www.aluminum.org/sustainability (accessed 8-3-22). ⁶Steel: The Clear Cut Alternative for Building Homes. Steel Recycling Institute, www.recycle-steel.org. Colours may be slightly different from their appearance in this brochure. Make final colour selections using actual product samples. Product Improvement Policy: Gentek Building Products is constantly improving product designs and manufacturing processes. We therefore must reserve the right to change specifications without notice. Please consult Gentek Building Products for current details. Trademarks mentioned in this document are the property of Gentek Building Products, its affiliates or their respective owners. Accessible formats and communication supports available upon request.