


WOOD FRAMING, WOOD SHEATHING, CONTINUOUS INSULATION, AIR/MOISTURE BARRIER WITH CLADDING OVER FURRING STRIPS

ASSEMBLY EXAMPLE WITH:	EnergyShield®	EnergyShield® CGF
CAVITY BATT INSULATION	R-20	R-20
EXTERIOR INSULATION 25.4mm (1.0")	R-6.5	R-6
TOTAL	R-25.5	R-25

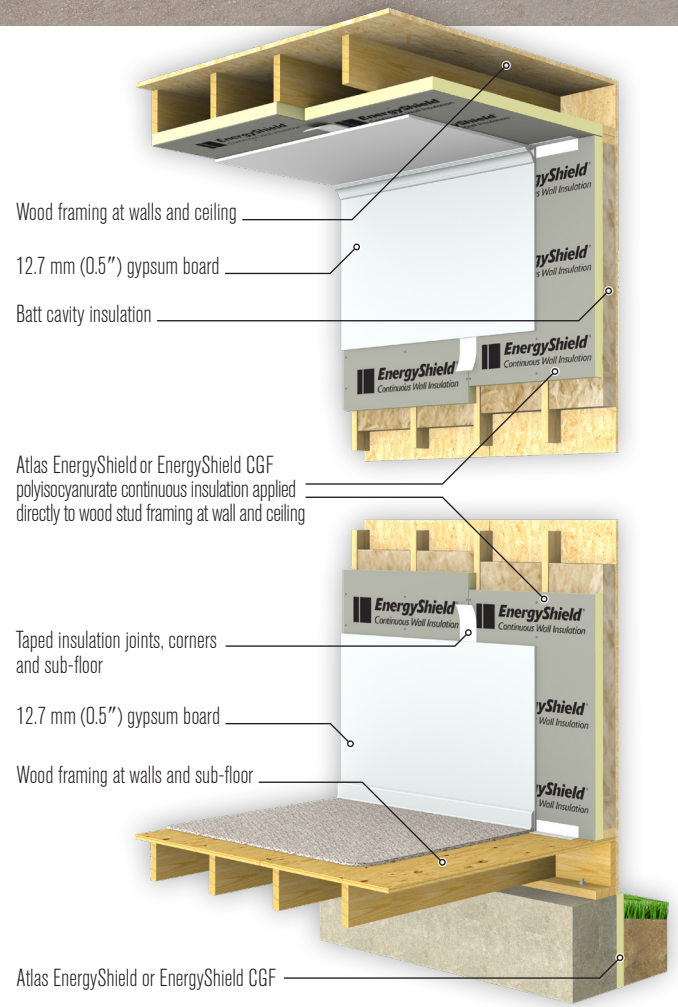

WOOD OR METAL FRAMING, BATT INSULATION IN THE STUD CAVITY, RIGID FOAM INSULATION FINISHED WITH 12.7 mm (0.5") GYPSUM THERMAL BARRIER