
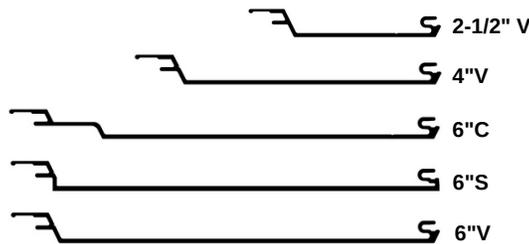
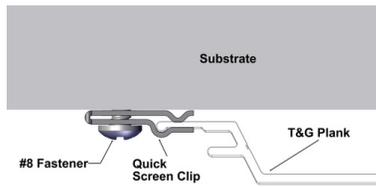


ENDURA CEILING SYSTEM

TYPICAL ISOMETRIC

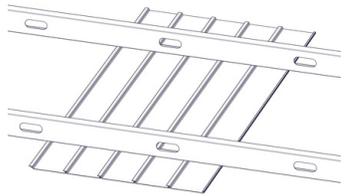

PROFILES

Perforated:

(6\"/>

- V-groove: 2-1/2\"/>

Non-perforated:

- V-groove: 2-1/2\"/>

COMPONENTS - Standard Lengths: 12'

Traditional: Back-to-Back Starter, Starter, 1-3/8\"/>

Craftsman: 3/4\"/>

Precision: 5/8\"/>

ECS_IS_RB_V4

1. 12' lengths,
20 FT² per box

2. 12' lengths,
48 FT² per box

3. 24' lengths,
96 FT² per box

FINISHES

Woodgrains, solid color, naturally aged metal, custom solid color matching (additional lead times apply)

ATTACHMENT

Planks: Quick-screen clips w. #8 Pan Head screws* @ 32\"/>

BIM & CAD

RVT & DWG files available, see website for details

LEAD TIME

Most Popular Finishes
-ready to ship within 1 week
Additional Finishes
-ready to ship within 14 weeks

TECHNICAL SPECIFICATIONS

PHYSICAL DATA

6063-T5 Extruded Aluminum
100% Recyclable
Warranty: Finish:15 year (standard)/20 year* (ultra) (*10 week lead time);
Aluminum: 50 year
Weight (lbs/sqft): ~1.5
2-1/2\"/>

TESTING

- ICC-ESR 4182 Evaluation Report - Division: 07 00 00 Thermal and Moisture Protection Section: 07 46 00 - Siding
CAN/ULC S102
CAN/ULC S114

LARR - Los Angeles Department of Building Safety (LADBS) accepts ICC-ES reports as proof of compliance

WUI (The Wildland-Urban Interface) – California Department of Forestry & Fire Protection Office of the State Fire Marshal Listing No. 8140-2286:0500



Fire Rating: Class A Non-Combustible by ASTM E136 & ASTM E84



Acoustical Rating with insulation: NRC up to 0.95



Light reflectance (LRV): Up to 73.2% (Ultra White)



info@longboardproducts.com
longboardproducts.com
800 604 0343